
225 G/M². 100% CORDURA® POLYAMIDE.

Technical Extreme Range

MATERIALS CHOSEN FOR YOUR NEEDS

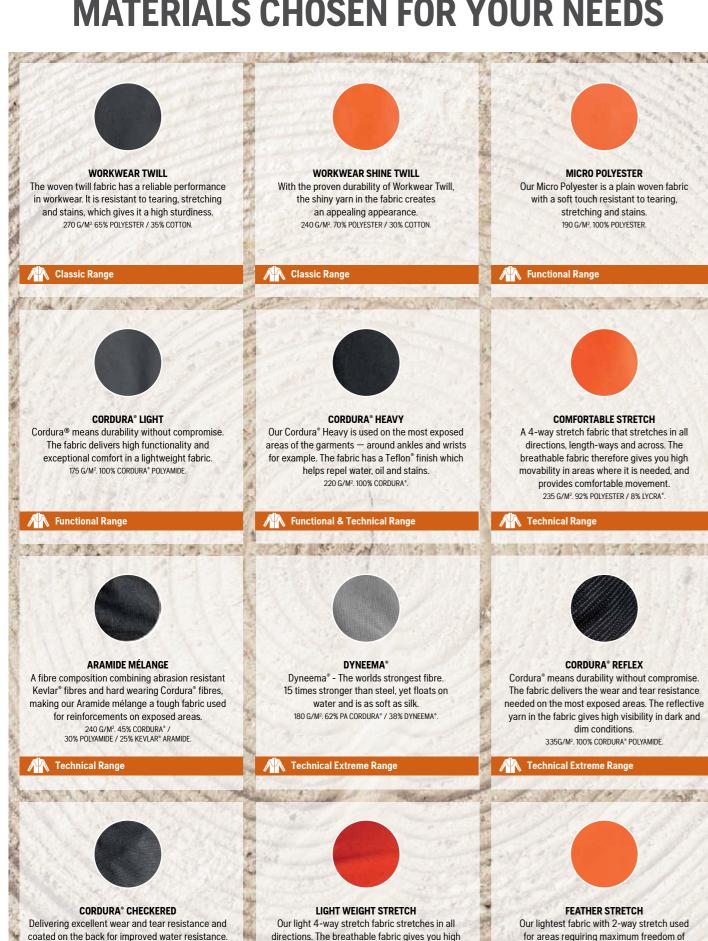

movability in areas where it is needed, and

provides maximum comfort.

190 G/M². 88% POLYESTER (14% POLYESTER COOLMAX[®]) /

12% ELASTANE (LYCRA®).

Technical Extreme Range

movement and high comfort. 185 G/M2, 66% POLYESTER / 34% ELASTANE.

Technical Robust & Extreme Range




FOREST JACKETS / STANDARD SIZES

SIZE	S	M	L	XL	XXL
CHEST (cm)	92-96	100-104	108-112	116-120	124-128

PROTECTIVE TROUSERS

SIZE	46	50	54	58	62
MODEL	S	M	L	XL	XXL
HEIGHT (cm)	170-176	176-182	176-182	182-188	188-194
WAIST (cm)	81-90	86-96	91-102	96-105	101-114
INSIDE LEG (inches)	31.5	32	32.5	33	33

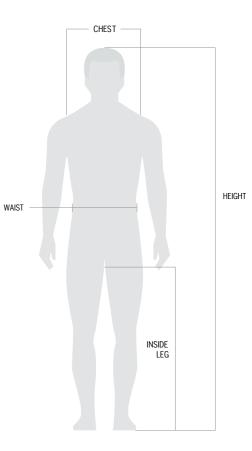

REPAIR GUIDE

In addition to washing and cleaning your protective wear, you also

need to check for heavily worn areas, damages and tears in the fabric.

The protective functions may be seriously reduced if repairs are not

carried out properly. Use the guide below for reference.

Note: All measurements are body measurements, except the inner leg, which is a garment measurement. If a base layer is to be worn under the garment, it should also be worn when measuring. Chest: measured around the widest part of the chest. Height: from top to toe. Waist: measured around the waist. Inside leg: measured from crotch to desired length

CARING FOR YOUR SAFETY CLOTHING

WASHING GUIDE

Your protective clothes are regularly exposed to sweat and oil. These substances can reach the protective layer, reducing its functionality. This is why you need to wash your clothes regularly and in accordance with their labelling. If your clothes get heavily soiled, you should wash them as soon as possible after use.



Wash the garment regularly in accordance with the instructions on the inside labelling.



Machine wash For temperature, see inside labelling.



If a repair to the outer material is being made, do not sew into the protective material as this can reduce its protective qualities.



Damaged outer material must be repaired immediately in order to prevent the protective material becoming damaged.



After washing, the garment should be stretched prior to drying. Air dry slowly.



Do not wash your protective clothes inside out. Also, do not bleach, dry clean, or tumble dry. Iron with low heat.



The garment should be scrapped and not used again if the protective material has been: damaged, incorrectly washed, or altered from its original shape



Adhesive must not be used when carrying out repairs as it may affect the protective material and reduce its protective qualities.



Clean the garment immediately if it has been subjected to petrol, oil, grease or other flammable materials. Fire hazardi



Keep the garment away from sharp objects, acids, oils, solvents, fuels and animal droppings.



This product is no substitute for the safe operation of a chainsaw and does not provide total protection.

Cut-retardant apparel and materials are subject to a certain degree of aging. In professional logging, the maximum period of usage is considered to be about 12 months. In non-professional or occasional use, up to 5 years is considered acceptable.